

PV SERIES

The PV Series of self-pressurising cryogenic vessels for liquid nitrogen are suitable for a host of applications within the industrial, medical, research and cryo-biological fields.

Each vessel has been designed to maintain pressure at a pre-set level using the integral pressure building circuit.

SPECIFICATION	PV 30	PV 60	PV 120	PV 160	PV 200	PV 240	PV 300	PV 400	PV 500	PV 1000	PV 2000
Product Code	9912- 5030	9912- 5060	9912- 5120	9912- 5160	9912- 5200	9912- 5240	9912- 5300	9912- 5400	9912- 5500	9912- 51000	9912- 2000
Capacity (litres)	30	60	120	160	200	240	300	400	500	1000	2000
Diameter (mm)	410	461	538	640	640	691	691	768	998	1058	1310
Base (mm)	430	490	550	680	680	705	705	798	1040	1250	1400
Height (mm)*	955	1150	1416	1457	1591	1587	1972	1845	1547	2295	2810
Weight Empty (kg)	42	60	112	120	143	150	167	196	240	590	1050
Weight Full (kg)	66	102	187	249	304	344	409	519	644	1627	2585
Maximum Allowable Working Pressure (bar G)	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.5
Static Evaporation Rate (% per day)**	3.3	2.0	1.2	1.1	0.9	0.8	0.8	0.7	0.6	1.2	1.1

* Measured from floor to top of contents gauge ** Measured at atmospheric pressure

PV SERIES

The PV series are manufactured from stainless steel and can be operated in all environments with excellent evaporation rates. Each vessel is fitted with an electronic contents gauge for accurate measurement of liquid level.

All units up to the PV 500 are fitted with heavy duty castors, and tow bars fitted from the PV 120 to PV 400 (optional on the PV 120 and PV 160)

All the units have a safety relief valve, burst disc & a pressure gauge, plus all the units except from the PV 1000 & 2000 have a dual fill/decant valve.



3000-

Flexible



The TPV Series are designed to TPED, approved for transporting full on European roads




Wessington Cryogenics Ltd 2 Gadwall Road, Rainton Bridge South Houghton-Le-Spring, Tyne & Wear, England DH4 5NL Tel: +44 (0)191 512 0677 Email: sales@wessingtoncryogenics.com






VALVES/PIPEWORK

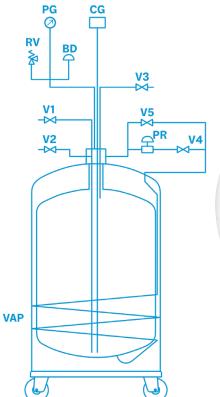


PV 30 - PV 500

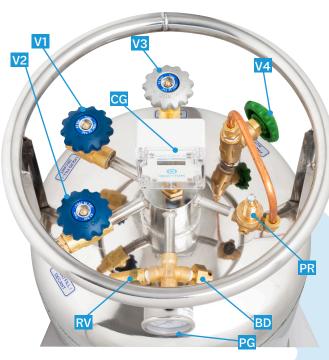

STANDARD ARRANGEMENT					
V1	Liquid fill/decant valve				
V2	Liquid fill/decant valve				
V3	Tri cock/gas vent/valve				
V4	Auto pressure raising				
	valve				
V5	Manual pressure raising				
	valve (optional)				
PR	Pressure regulator				
PG	Pressure gauge				
RV	Relief valve				
BD	Burst disc				
CG	Contents gauge				
VAP	Pressure build vaporiser				

PV 1000 - PV 2000

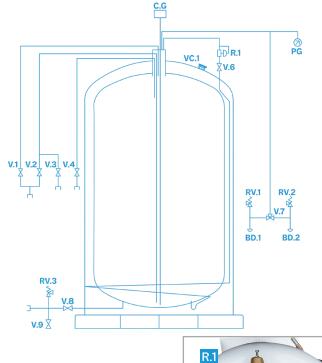





STAN	DARD ARRANGEMENT					
V1	Top fill valve					
V2	Bottom fill valve					
V3	Liquid decant valve					
V4	Tri cock / vent valve					
V6	Pressure build valve					
V7	Change over valve					
V8	Bottom decant valve					
V9	Blown down valve					
RV. 1/2	Primary relief valve					
RV. 3	Line relief valve					
BD. 1/2	Burst disc					
R. 1	Pressure build regulator					
C.G	Contents gauge					
P.G	Pressure gauge					
VC.1	Vacuum port					

